



TECHNICAL SPECIFICATIONS

HandyPROBE 		HandyPROBE Next™	HandyPROBE Next™ Elite
WEIGHT		0.5 kg	
ACCURACY ⁽¹⁾		Up to 0.025 mm	Up to 0.020 mm
SINGLE POINT REPEATABILITY ⁽²⁾	9.1 m ³ ⁽⁴⁾	0.060 mm	0.044 mm
VOLUMETRIC ACCURACY ⁽³⁾		0.086 mm	0.064 mm
SINGLE POINT REPEATABILITY ⁽²⁾	16.6 m ³ ⁽⁴⁾	0.088 mm	0.058 mm
VOLUMETRIC ACCURACY ⁽³⁾		0.122 mm	0.078 mm

MetraSCAN3D 		MetraSCAN 350™	MetraSCAN 350™ Elite	MetraSCAN 750™	MetraSCAN 750™ Elite
WEIGHT		1.38 kg			
ACCURACY ⁽¹⁾		Up to 0.040 mm		Up to 0.030 mm	
VOLUMETRIC ACCURACY ⁽³⁾	9.1 m ³ ⁽⁴⁾	0.086 mm	0.064 mm	0.086 mm	0.064 mm
	16.6 m ³ ⁽⁴⁾	0.122 mm	0.078 mm	0.122 mm	0.078 mm
RESOLUTION		0.050 mm			
MEASUREMENT RATE		205,000 measurements/s		480,000 measurements/s	
SCANNING AREA		225 x 250 mm		275 x 250 mm	

(1) Typical value for diameter measurement on a calibrated sphere artefact.
 (2) Based on the ASME B89.4.22 standard. The probe of the HandyPROBE Next is located within a conical socket. Individual points are measured from multiple approach directions. Each individual point measurement is analyzed as a range of deviations in X, Y, Z (value = range/2).
 (3) Based on the ASME B89.4.22 standard. Performance is assessed with traceable length artefacts by measuring these at different locations and orientations within the working volume of the C-Track (value = maximum deviation).
 (4) The volumetric accuracy performance of the HandyPROBE Next/MetraSCAN 3D is dependent on the working volume in which the measurement is made: 9.1 m³ or 16.6 m³.

DISCOVER THE BEST MEASURING ARM. YOURS.



AMETEK GmbH
 Division Creaform Deutschland
 Meisenweg 37
 D - 70771 Leinfelden-Echterdingen
 T. + 49.711.1856.8030 | F. + 49.711.1856.8099
germany@creaform3d.com | creaform3d.com



Authorized Distributor

HandyPROBE, HandyPROBE Next, C-Track, MetraSCAN 3D, MetraSCAN 350, MetraSCAN 750, and their respective logos are trademarks of Creaform Inc. © Creaform Inc. 2019. All rights reserved. V1





reddot award 2016
best of the best

Portable optical CMM



The **HandyPROBE Next™ portable optical CMM** provides measurement accuracy that is insensitive to the instabilities of any environment. Free of any rigid measurement setup, the part, optical tracker and wireless probe can all be moved at any time during the measurement sequence. Specifically designed for use on the shop floor, the system offers unmatched flexibility and a wider measurement volume than other portable CMMs.



reddot award 2016
best of the best

Optical CMM 3D scanner



Free of any rigid measurement setup, the **MetraSCAN 3D™ optical CMM scanner** provides shop floor measurement accuracy that is insensitive to the instabilities of the environment. With its extendable measurement volume, incredible speed and impressive data acquisition proficiency with challenging materials, it represents the most complete metrology-grade 3D scanner on the market and a practical alternative to traditional portable CMMs.



Sturdy design
for shop floor
hardware
reliability



Multi-function buttons
for easier interaction
with the software



25% lighter

Sturdy design for
shop floor hardware
reliability



12X faster with
7 laser crosses

Tackles black,
multicolored and
shiny surfaces


1.5X more
accurate



Multi-function buttons
for easier interaction
with the software


Included with both systems, the **C-Track™ optical tracker** is at the core of the Creaform optical CMM's ability to perform real-time dynamic referencing of its scanning and probing devices as well as targets on a part. Built with high-end optical components, the C-Track drives the metrology-grade measurements of the whole system.

COMBINATION OF SCANNING AND PROBING




Versatility of the measurement system: probing for geometrical entities and scanning for complete surface inspection.

DYNAMIC REFERENCING



Same level of accuracy regardless of the environmental instabilities, user experience level, and setup rigidity.

EXTENDABLE MEASUREMENT VOLUME

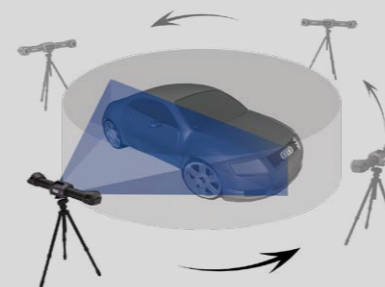

Flexible measurement volume that can be easily and dynamically extended without loss in accuracy or conventional leapfrogs.